



MIOL - B

MEDIUM INTENSITY

NOCTURNAL

ACCORDING TO ICAO TYPE B

ACCORDING TO FAA L864

Promic

LXS
LUXSOLAR®

ICAO FEATURES

Light type	Medium intensity B
Lighting	Nocturnal
Colour	Red
Signal type	Flashing (20-40-60 fpm)
Luminance	2.000 cd

TECHNOLOGICAL FEATURES

Optics	Polycarbonate lenses
Light source	1 level of 24 LED
Cooling system	Central convection
Condensation system	Gore-Tex valve
External protection	Borosilicate thermal hardened glass
Electronic access	Electronic cards in cabinet

ELECTRICAL FEATURES

Available power supply	24 Vdc or 230 Vac
Average consumption (40 fpm in 24V)	3 W
Moisture protection	IP 66
Operating temperatures	-30°C to +50°C
LED lifetime	10 years minimum at 20°C

ENVIRONMENTAL FEATURES


Area	Safe, without explosion risks
Body structure	Anodised aluminium
Weight	5 Kg
Diameter	220 mm
High	130 mm

OTHER

Included fixing	Stainless steel side fixing
STAC certificate	2013A037
Warranty	36 months
Available options	Fault contacts; twilight sensor; 180°; TWIN light (double LED circuit)



Natural central convection

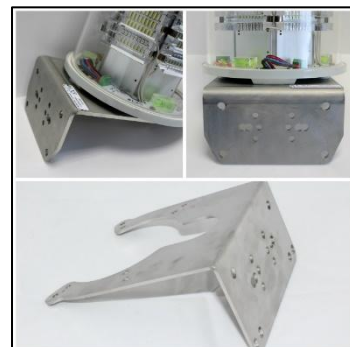


Included side fixing




Side fixing and junction box

DIMENSIONS & EMISSIONS SCHEMES

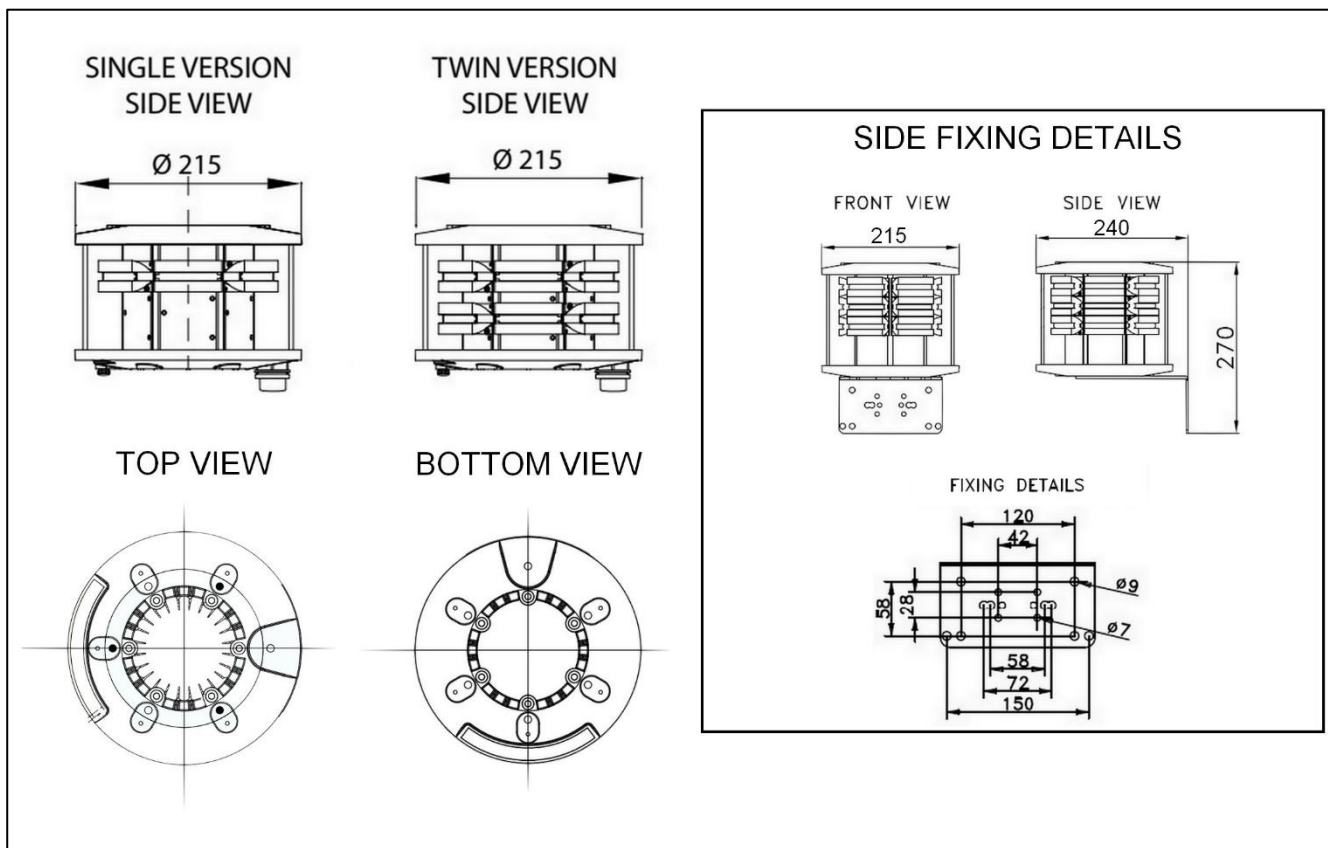

Toutes les spécifications techniques sont susceptibles d'être modifiées sans préavis

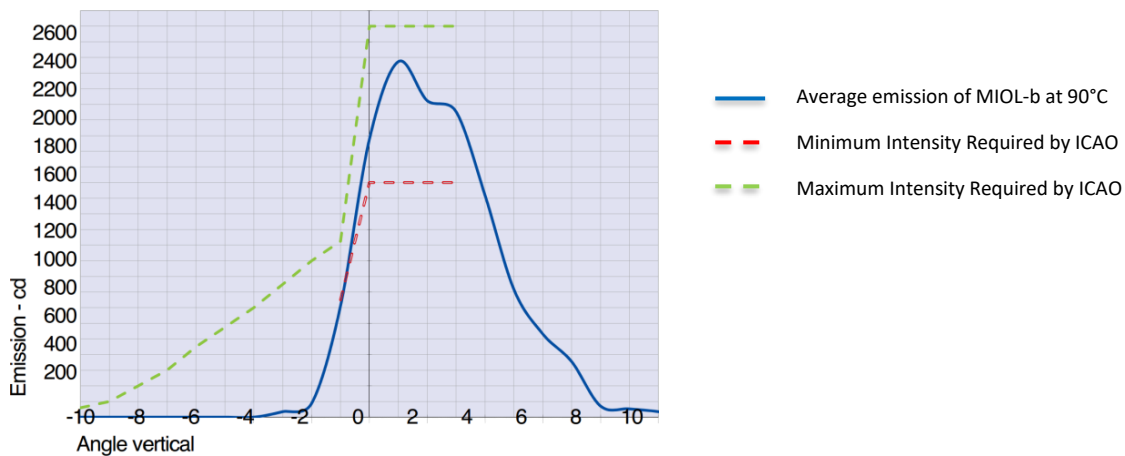

BUSINESS APPLICATION



Pylons



Cranes



Chimneys



Buildings



Wind turbines