


Lighted windsock with tiltable mast 6.20m

*Wind direction indicator
for heliport*

Réf. FH950005

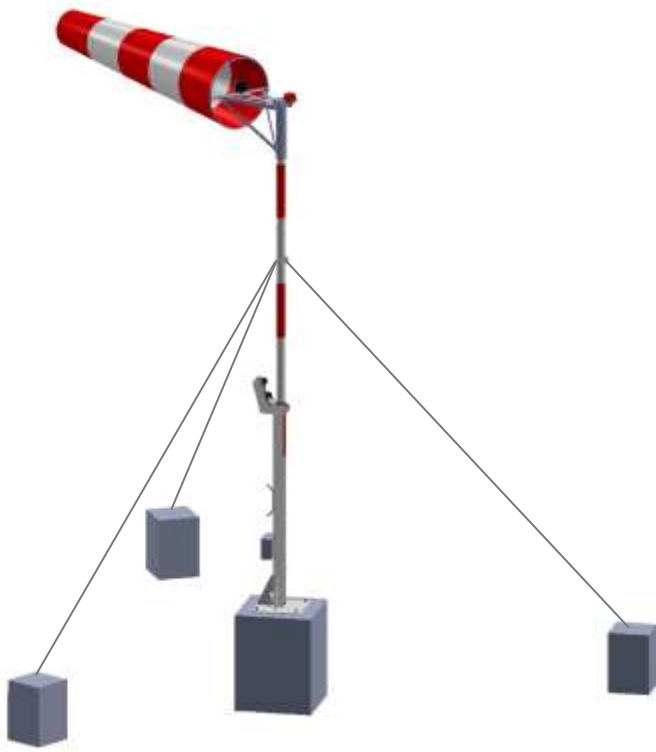

Illuminated wind direction indicator

The mast fits to ICAO Standards. It can be pull down, measures 6.20 meters, and it is delivered with its pull-down system, its fixing and its lifting pulley block system.

A LED obstruction light (32cd) is installed at the top of the mast (nocturnal fixed red light, STAC certificated) and a lighting windsock.

To facilitate its installation, PROMIC'S wind direction indicator is delivered pre-mounted.



FEATURES FOR WINDSOCK

Technical features:

Colours	Red and white
Fixing	Collar fixing
Grammage	120g/m ²
Dimensions	Ø60 x 240 cm
Material	UV ray resistant polyester



Tiltable mast for maintenance


FEATURES FOR MAST



Les descriptions, mesures photométriques et caractéristiques contenues dans cette publication sont données à titre d'information et ne constituent pas un engagement pour l'entreprise PROMIC, qui se réserve le droit de les modifier sans notification préalable.

Technical features:	
<i>Height</i>	6,20 meters – 3 tubes of 1.90m
<i>Inclination</i>	Yes
<i>Protection</i>	Galvanized steel
<i>Colours</i>	Red and white
<i>Fixing</i>	Sealing plate
<i>Weathercock</i>	Yes
<i>Internal lighting</i>	Yes – LED projector
<i>Wires</i>	3 x 120cm (included)
<i>Massive concrete</i>	600 x 600 x 800
<i>Upper beacon</i>	LIOL B 32 cd
<i>Wind speed</i>	150 km/h
<i>Standards and legislation</i>	CE EN60947-1 CEI60364, NF C15-100 2014 / 35 / UE OACI Annex 14, Volume II, Chapter 5
<i>Warranty</i>	24 months

FEATURES FOR INTERNAL LIGHTING

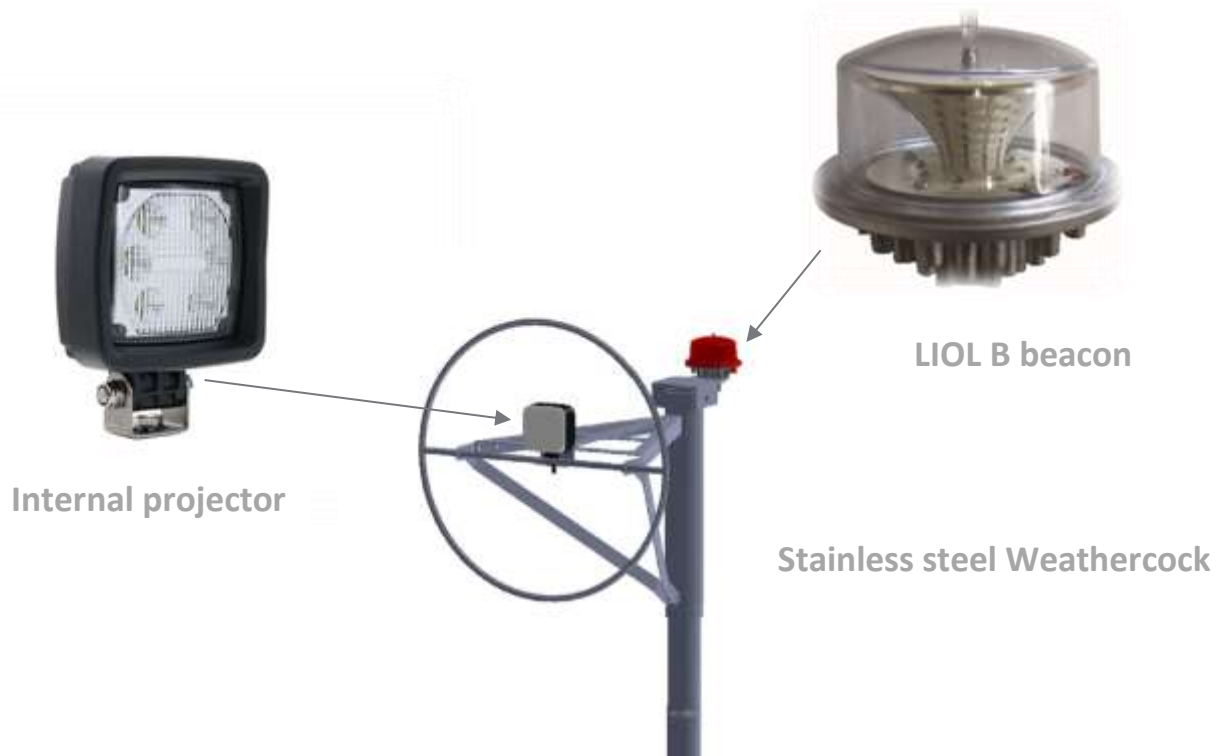

Lighting features	Projector :	LIOL B beacon :
<i>Lighting source</i>	LEDs	LEDs
<i>Colour</i>	White	Red
<i>Lifetime</i>	50 000 hours	100 000 hours
<i>brightness</i>	1000 lumens	32cd
Electrical features :		
<i>Power supply</i>	24V	24V
<i>Operating temperatures</i>	-40°C to +80°C	-45°C to +55°C
<i>Consumption</i>	2W	3W
<i>Protection Index</i>	IP68	IP68
Mechanical features :		
<i>Body component</i>	Plastic	Aluminium
<i>Window component</i>	PMMA	PMMA
<i>Dimensions</i>	101x57mm	Ø 120X271
<i>Weight</i>	0.5Kg	1Kg
<i>Standards and legislation</i>		2011A102

Les descriptions, mesures photométriques et caractéristiques contenues dans cette publication sont données à titre d'information et ne constituent pas un engagement pour l'entreprise PROMIC, qui se réserve le droit de les modifier sans notification préalable.